


20 Install fascia boards on front and back of cabin .

- (a) Fasten fascia boards into ends of rafters with two screws in each location as shown.
- (b) If roof boards do not align with corners of front and back fascia boards, strike a chalk line and saw along line.



- 21** Align the first piece of tar paper along bottom edge of roof. Attach additional paper to cover the roof half while overlapping the paper using the overlap line. Attach paper using 1" long roofing cap nails. Nail the felt only where necessary to hold it in place and along the outside edges. Repeat this process on the other roof half. Cut off excess paper at top and sides.

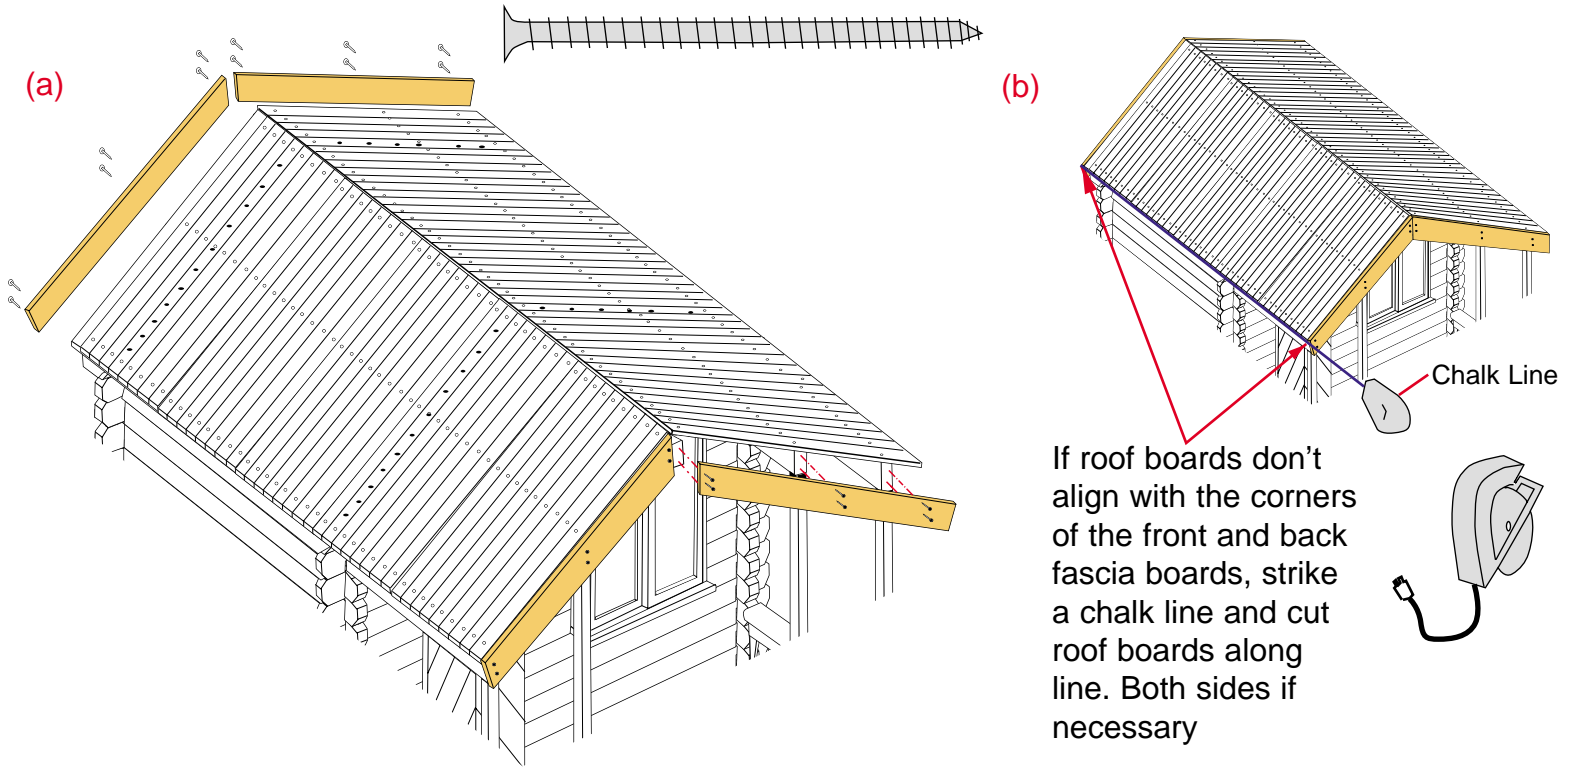